



PRECISE S2

Portable 3D Laser Scanner Scan it · See it · In true color


Scan Once. Save 80% of Your Time.

One sweep. Total coverage. Instant results-with no second chances needed.

360° Super-Wide FOV

Capture the entire scene in one sweep with **Hybrid Rotating Mirror Technology for instant** full-surround coverage.

Powered by hybrid-solid rotating mirror technology, the PRECISE S2 delivers a 360° ultra-wide field of view. It enables comprehensive, real-time spatial awareness with no directional blind spots – perfect for capturing the full scene.











Progressive FOV Expansion

Full coverage in 1 second, outperforms standard multi-line LiDARs with fewer moves.

The PRECISE S2 continuously expands its field of view with each passing second. In just 1 second, it reaches near-total spatial coverage – outperforming typical multi-line mechanical LiDARs limited to fixed vertical FOVs of 27°-41°.




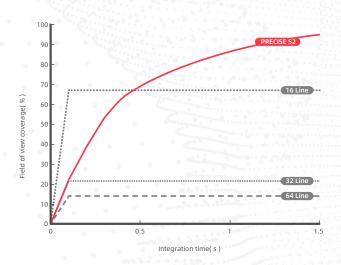

25° Tilted Mounting Angle

Wider coverage. Fewer passes.

The PRECISE S2 is mounted with a 25° downward tilt, enabling it to capture the floor, forward objects, and ceiling in a single scan. This eliminates the need for repeated angle adjustments during operation – greatly improving efficiency in handheld workflows.

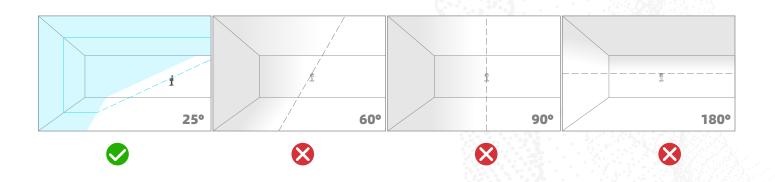






If You Can Walk It, You Can Scan It.

Move freely, scan precisely, no blind spots, even in GNSS-denied or confined spaces.

10cm Minimum Detection Range

Ultra-Close Detection ensures zero blind spots, even along walls and in corners.

With a minimum detection range of just 10 cm, the PRECISE S2 excels at identifying nearby objects. Its compact form factor allows flexible mounting and ensures no area goes unseen – even in tight spaces.

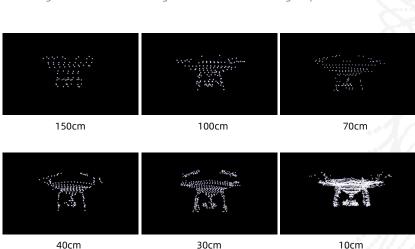








Active Anti-Interference

Always on track with no signal interference, even in multi-LiDAR or high-reflection environments.

Engineered with advanced anti-interference capabilities, the PRECISE S2 delivers stable performance even in multi-lidar environments. Indoors or out, it stays focused – unaffected by overlapping signals.

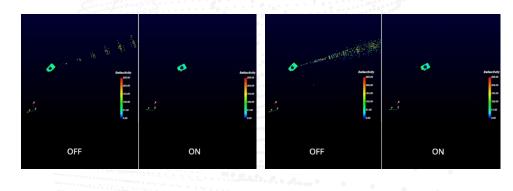

Built-in High-Frequency IMU

More stable scans. More precise models.

Equipped with a 6-axis IMU (3-axis accelerometer + 3-axis gyroscope), the PRECISE S2 delivers high-frequency motion tracking at 200 Hz. This ensures enhanced accuracy in handheld 3D scanning, even during movement or complex scenes.









Scan Today. **Model Today.**

Dual 1-inch sensors and precise sync deliver crisp, colorized scans, ready to use, wherever your data goes.

Dual 1-Inch Image Sensors

Sharper photos. More vivid point clouds.

Equipped with dual 1-inch CMOS sensors featuring 2.4µm pixels and 16MP resolution per lens, the PRECISE S2 captures clearer, high-fidelity images – enabling more accurate and vibrant point cloud coloring. Together, the dual cameras provide a combined field of view of 270° horizontally and 360° vertically, ensuring full-scene coverage from ground to ceiling.









Sharper Point Clouds, Perfectly Fused

Cleaner visuals. Greater precision.

With microsecond-level time synchronization across all sensors, PRECISE S2 delivers highly accurate point clouds where color and intensity data align seamlessly improving modeling precision and visual clarity.



High-Fidelity SLAM by Design

Richer data. Smarter mapping.

PRECISE's proprietary laser + vision SLAM delivers ultra-dense, real-time point clouds with vibrant, consistent coloring. Robust to motion and scene variation, it's ready for the toughest indoor and outdoor environments.



Real-Time Preview, **Precision Results**

What you see is what you get. Anywhere, anytime.

PRECISE S2 comes with a dedicated mobile app for Android and iOS, enabling real-time preview of true-color point clouds directly on your phone. During scanning, users can stream, download, and replay point cloud data - all in the palm of their hand.









Small, Simple, Powerful. All Day Long.

High-precision scanning in a compact form-just one device, one person, zero downtime.

Ultra-Light. Ultra-Mobile

Just 1 kg-built for handheld scanning.

Designed for true mobility, PRECISE S2 weighs only around 1 kg-small enough to navigate narrow spaces, light enough for long shifts without fatigue. Whether handheld or carried on your shoulder, it's ready for fast-paced, go-anywhere scanning.

As Easy as a Photo. Smarter Than Ever

Tap to scan. Always up to date.

No laptop. No cables. Just open the app on your phone or tablet and scan like you're taking a photo. With over-the-air firmware updates and no need for factory recalibration, PRECISE S2 stays ready anytime, anywhere-zero downtime, full autonomy.







Power Through the Day. No Interruptions

Hot-swap and keep going.

With 2.5 hours of tested runtime and USB-C power bank support, you can keep scanning without a pause. Swap power on the fly, no restart required-perfect for long days in the field and back-to-back jobs with no room for failure.



One S2. Many ScanStations Replaced

Survey-grade detail with 40-line density and ≤1 cm accuracy.

PRECISE S2 delivers the precision and coverage of multiple tripod-based scanners—all in a single, compact unit. Capture high-density, colorized point clouds for BIM, security, and routine surveys—while cutting down on gear, setup time, and field crew.









Post-Processing Powerhouse

From scan to model - ready for your workflow.

Mesh-Ready Raw Data

Your data, your pipeline.

Full access to original scan and image data enables mesh modeling through custom SLAM integration – ideal for surveying, inspection, and digital twin applications.

Optimized for 3DGS Modeling

Sharper images, better reconstruction.

With a 1-inch sensor and embedded pose encoding, photos are sharp, color-accurate, and precisely aligned – perfect for high-fidelity 3DGS reconstruction.









Direct BIM/CAD Integration

Point clouds that fit right in.

Point clouds flow seamlessly into BIM and CAD platforms, accelerating accurate drafting and streamlining post-processing workflows.



Free Point Cloud Processing Software

No extra fees. No limits.

PRECISE S2 includes a full-featured point cloud software suite at no extra cost. Users can view, edit, replay, and export colorized point clouds – without subscription fees or added expenses.









Technical Specifications

Basics

Weight Main Unit: 700 g Grip Battery: 379 g

Overall: 1079 g

Protection Class IP5X

Working Temperature -20 °C to 55 °C Storage Temperature -20 °C to 60 °C

WIFI WIFI 6, Support 2.4G/5G

> 802.11 a/b/g/n/ac/ax Wi-Fi 2.4G: 2.400 ~ 2.4835 GHz

5G: 5.15 ~ 5.35GHz, 5.47 ~ 5.725GHz

5.725 ~ 5.85GHz

WIFI Distance 20 m Bluetooth Support

Dimensions Overall: 110.5 * 140 * 313.3mm;

Main Unit: 110.5 * 114 * 143.1mm

Storage Capacity 256 G(Support memory expansion)

Supply Voltage 13.2 V ~ 16.8 V Working Power < 24 W

Interface TF Card slot / Type-C

Processor Performance 8-core 64-bit processor, clock speed 2.4 GHz

RTK

Horizontal 0.8 cm + 1 ppm; RTK Accuracy

Vertical 1.5 cm + 1 ppm

Supported Regions China / Overseas

Support Satellite BDS: B1I, B2I, B3I, B1C, B2a, B2b

GPS: L1C/A, L1C, L2C, L2P(Y), L5

GLONASS: L1, L2, L3 Galileo: E1, E5a, E5b, E6 QZSS: L1C/A, L1C, L2C, L5

NavIC: L5 SBAS: L1

Camera

Sensor Size 13.13 * 8.76 mm; 1 inch

Pixel Size 2.4 µm

3504 * 4672 pixels Image Size **Effective Pixels** Single lens 16 million

Shutter Type Mechanical shutter; Electronic shutter

Aperture Fixed F2.8 Focal Length 3.5 mm Lens Number

Lens FOV Horizontal: 140° Vertical: 200°

Image Format IPG

V-SLAM Camera

Focal Length 1.68 mm Image Pixel 1280 * 800 Effective Pixels 1 million Frame Rate 30 HZ

Battery

Battery Capacity 45.36 wh (3150 mAh) Supply Voltage 14.8 V ~ 16.8 V Working Time 150 min **Charging Port** Type-C **Charging Power** PD 30 W 120 min **Charging Time**

Data& Software













